


2 PIECE BALL VALVES - FLOATING - Light

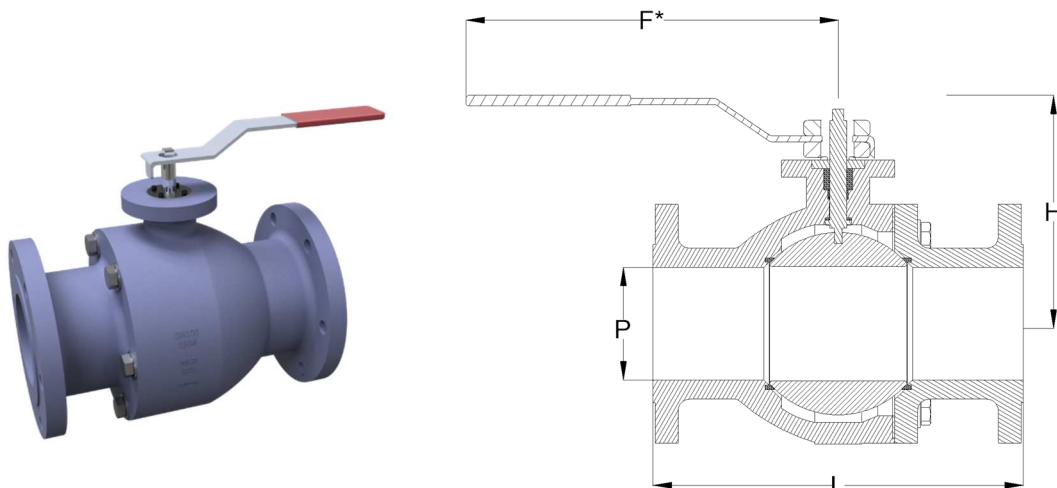

CODES AND STANDARDS

Design	Design as per BS5351, ASME B16.34 & ISO 17292
Mounting (Optional)	ISO 5211 Top flange
Fire Safe (Optional)	FIRE SAFE as per BS API 607
Testing	Pressure testing according, API 598, BS 12266-1
End to End dimensions	Face to Face as per ASME B16.10 / ASME B16.34
End Details	RF, RTJ End Connection as per ASME B16.5
Butt Welding	Butt Weld as per ASME B16.25

RATING - 150#



DN (inch)	L	H	F	Weight (Kg) Approx
15 (1/2")	108	110	164	2
20 (3/4")	117	117	164	3
25 (1")	127	129	164	3.5
40 (1.1/2")	165	148	213	8
50 (2")	178	155	348	11
65 (2.1/2")	191	169	445	16
80 (3")	203	207	495	23
100 (4")	229	231	698	38
150 (6")	267	298	868	88
200 (8")	292	352	Gear Operated	155
250 (10")	330	499		175

RATING - 300#

DN (inch)	L	H	F	Weight (Kg) Approx
15 (1/2")	140	110	164	3
20 (3/4")	152	117	164	4
25 (1")	165	129	164	5
40 (1.1/2")	190	148	213	11
50 (2")	216	155	213	14
65 (2.1/2")	241	180	213	30
80 (3")	283	207	445	32
100 (4")	305	231	495	52
150 (6")	403	298	698	94
200 (8")	419	443	Gear Operated	157
250 (10")	457	510		263

OTHER CONFIGURATIONS:

FIRE SAFE DESIGN & NON-FIRE SAFE DESIGN

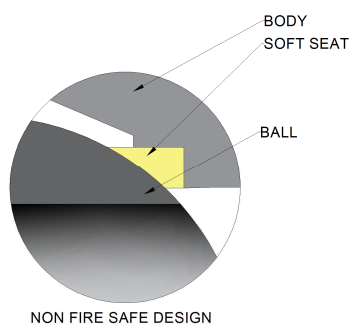

GEAR, ELECTRIC AND PNEUMATIC ACTUATOR OPERATED

