
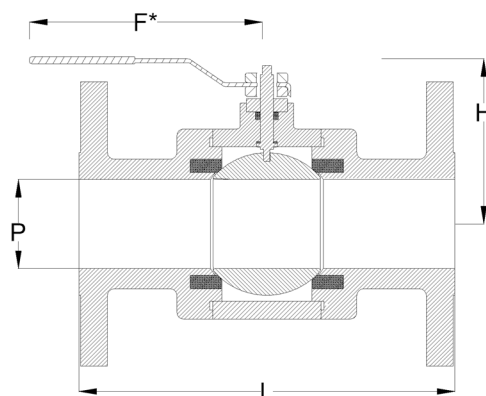


3 PIECE BALL VALVES - FLOATING - Light

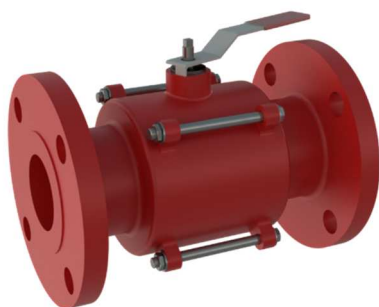

CODES AND STANDARDS



Design	Design as per BS5351, ASME B16.34 & ISO 17292
Mounting (Optional)	ISO 5211 Top flange
Fire Safe (Optional)	FIRE SAFE as per BS API 607
Testing	Pressure testing according, API 598, BS 12266-1
End to End dimensions	Face to Face as per ASME B16.10 / ASME B16.34
End Details	RF, RTJ End Connection as per ASME B16.5
Butt Welding	Butt Weld as per ASME B16.25

RATING - 150#

DN (inch)	L	H	F	WEIGHT (Kg) Approx
15 (1/2")	108	110	164	3
20 (3/4")	117	117	164	4
25 (1")	127	129	164	4.2
40 (1.1/2")	165	148	213	9
50 (2")	178	155	348	12
65 (2.1/2")	191	169	445	17
80 (3")	203	207	495	24
100 (4")	229	231	698	40
150 (6")	267	298	868	98
200 (8")	292	352	Gear Operated	165
250 (10")	330	499		210

RATING - 300#

DN (inch)	L	H	F	WEIGHT (Kg) Approx
15 (1/2")	140	110	164	4
20 (3/4")	152	117	164	5
25 (1")	165	129	164	6
40 (1.1/2")	190	148	213	13
50 (2")	216	155	213	18
65 (2.1/2")	241	180	213	34
80 (3")	283	207	445	39
100 (4")	305	231	495	62
150 (6")	403	298	698	114
200 (8")	419	443	Gear Operated	177
250 (10")	457	510		285

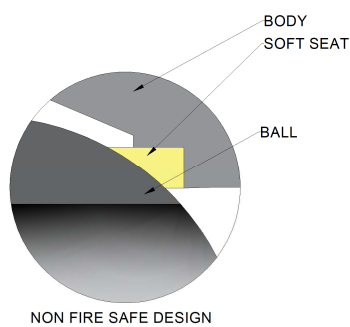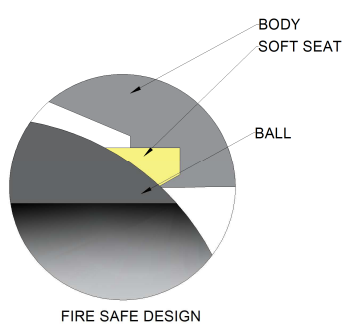OTHER CONFIGURATIONS:**FIRE SAFE DESIGN & NON-FIRE SAFE DESIGN****GEAR, ELECTRIC AND PNEUMATIC ACTUATOR OPERATED**