


BUTTERFLY VALVES - CENTRIC TYPE - FLANGED

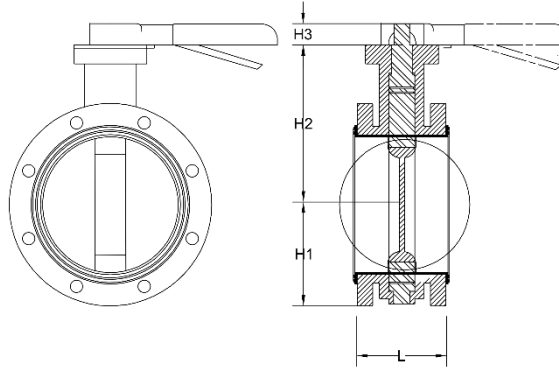

CODES AND STANDARDS

Design	Design as per ASME B16.34, ISO 5752, API 609, BS 5155, EN 593
Mounting (Optional)	ISO 5211 Top flange
Testing	Pressure testing according to API 598, BS 12266-1
End to End dimensions	Face to Face as per ASME B16.34, API 609, BS 5155
End Details	Flanged to suit ASME B16.5, EN 1092-1, JIS Series

RATING - PN10, PN16,150#

DN (inch)	L	H1	H2	H3	Weight - Flanged
50 (2")	108	115	182	45	7
65 (2. 1/2")	112	130	200	45	9
80 (3")	114	140	215	45	12
100 (4")	127	160	232	45	18
125 (5")	140	185	245	45	23
150 (6")	140	190	260	45	31
200 (8")	152	220	292	65	47
250 (10")	165	270	353	65	67
300 (12")	178	300	372	65	103
350 (14")	190	342	440	80	146
400 (16")	216	380	460	80	176
450 (18")	222	402	492	120	222
500 (20")	229	432	552	120	268
550 (22")	229	465	572	120	396
600 (24")	267	510	610	120	413
650 (26")	267	540	630	120	524
700 (28")	292	570	665	120	538
750 (30")	292	595	695	140	832
800 (32")	318	640	740	140	1076
900 (36")	330	705	800	140	1590
1000 (40")	410	675	865	140	2124
1100 (44")	410	830	925	170	2453
1200 (48")	470	890	990	170	2732
1300 (52")	500	920	970	180	2900
1400 (56")	530	950	1160	180	3206
1600 (64")	600	1100	1260	180	3734
1800 (72")	670	1200	1370	200	4463

OTHER CONFIGURATIONS:

GEAR, ELECTRIC AND PNEUMATIC ACTUATOR OPERATED