
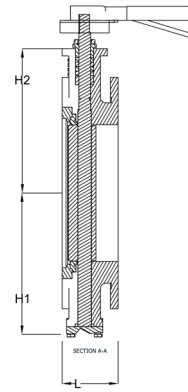


BUTTERFLY VALVES - DOUBLE ECCENTRIC TYPE - FLANGED



CODES AND STANDARDS

Design	Design as per ASME B16.34, ISO 5752, API 609, BS 5155, EN 593
Mounting (Optional)	ISO 5211 Top flange
Testing	Pressure testing according to API 598, BS 12266-1
End to End dimensions	Face to Face as per ASME B16.34, API 609, BS 5155
End Details	Flanged to suit ASME B16.5, EN 1092-1, JIS Series

RATING - PN10, PN16, PN25, 150#, 300#

DN (inch)	L150#	L300#	H1	H2	H3	Weight - Flanged
50 (2")	108	150	115	182	45	7
65 (2. 1/2")	112	170	130	200	45	9
80 (3")	114	180	140	215	45	12
100 (4")	127	190	160	232	45	18
125 (5")	140	200	185	245	45	23
150 (6")	140	210	190	260	45	31
200 (8")	152	230	220	292	65	47
250 (10")	165	250	270	353	65	67
300 (12")	178	270	300	372	65	103
350 (14")	190	290	342	440	80	146
400 (16")	216	310	380	460	80	176
450 (18")	222	330	402	492	120	222
500 (20")	229	350	432	552	120	268
550 (22")	229	390	465	572	120	396
600 (24")	267		510	610	120	413
650 (26")	267		540	630	120	524
700 (28")	292		570	665	120	538
750 (30")	292		595	695	140	832
800 (32")	318		640	740	140	1076
900 (36")	330		705	800	140	1590
1000 (40")	410		675	865	140	2124
1100 (44")	410		830	925	170	2453
1200 (48")	470		890	990	170	2732
1300 (52")	500		920	970	180	2900
1400 (56")	530		950	1160	180	3206
1600 (64")	600		1100	1260	180	3734
1800 (72")	670		1200	1370	200	4463

OTHER CONFIGURATIONS:

GEAR, ELECTRIC AND PNEUMATIC ACTUATOR OPERATED