


WAFER CHECK VALVES

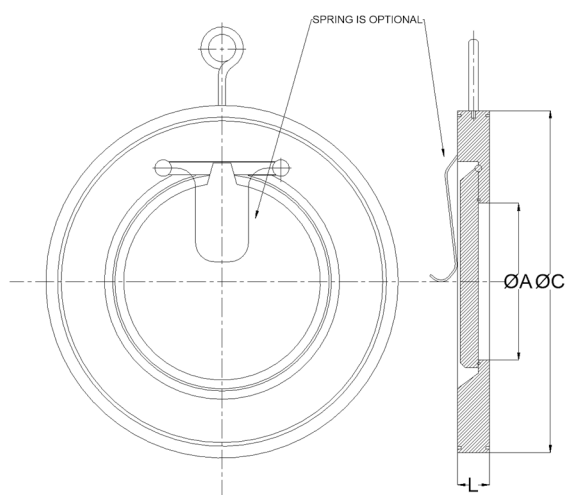

DESIGN STANDARD

Check Valve	ASME B16.34 & API 6D
Face to Face / End to End Dimensions	API6D, ASME B16.34, Mnfr's Std
Valve inspection & testing	API598
Pressure - Temperature rating	ASME B16.34

RATING - 150#, Up to PN 40

DN (inch)	A (ID)	L	C (OD)	WT IN KG (APPR)
1" (DN25)	13	19	64	0.5
1 ½" (DN40)	21	19	85	1
2" (DN 50)	30	19	105	1.5
2 1/2" (DN 65)	40	19	124	1.85
3" (DN 80)	52	19	137	2.25
4" (DN 125)	71	19	175	4
5" (DN 125)	93	19	197	5
6" (DN 150)	114	19	222	6
8" (DN 200)	157	29	279	14
10" (DN 250)	195	29	340	21
12" (DN 300)	230	38	410	40
14" (DN 350)	270	44	451	56
16" (DN 400)	311	51	514	84
18" (DN 450)	361	60	549	113
20" (DN 500)	392	64	606	150
24" (DN 600)	480	70	717	224

Configurations:

Metal Seated, Soft Seated