
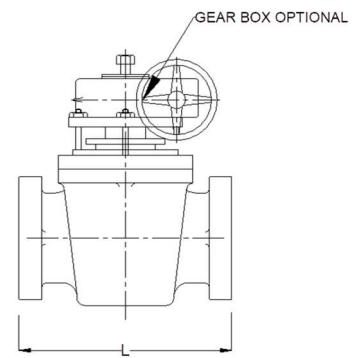


PLUG VALVES - NON-LUBRICATED (SLEEVED) & LUBRICATED

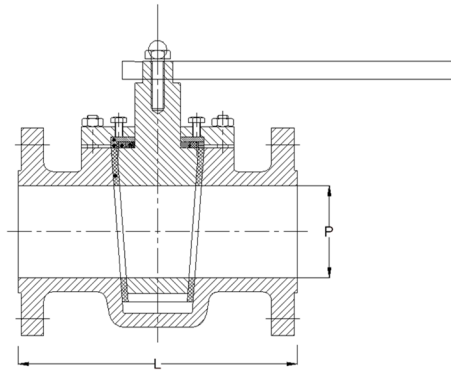

CODES AND STANDARDS

Design	API 599
Mounting (Optional)	ISO 5211 Top flange
Testing	Pressure testing according, API 598, BS 12266-1
End to End dimensions	Face to Face as per ASME B16.10 / ASME B16.34
End Details	RF, RTJ End Connection as per ASME B16.5, EN 1092-1, JIS
Butt Welding	Butt Weld as per ASME B16.25

RATING - 150#

DN (inch)	L	H	F	WEIGHT (Kg) Approx
25 (1")	141	125	280	4
40 (1.1/2")	165	158	280	5
50 (2")	178	114	305	7
65 (2.1/2")	190	120	457	11
80 (3")	203	127	457	17
100 (4")	229	154	762	25
150 (6")	254	200	Gear	32
200 (8")	267	241		43
250 (10")	292	279	Gear	76
300 (12")	330	317	Operated	112
350 (14")	356	330		168

RATING - 300#

DN (inch)	L	H	F	WEIGHT (Kg) Approx
50 (2")	216	114	305	12
65 (2½")	241	120	457	17
80 (3")	283	127	457	21
100 (4")	305	154	762	35
125 (5")	381	175		49
150 (6")	403	196		68
200 (8")	419	241	Gear	107
250 (10")	457	279	Operated	164
300 (12")	502	317		241
350 (14")	762	380		350