


BASKET STRAINERS - FABRICATED AND CAST STEEL

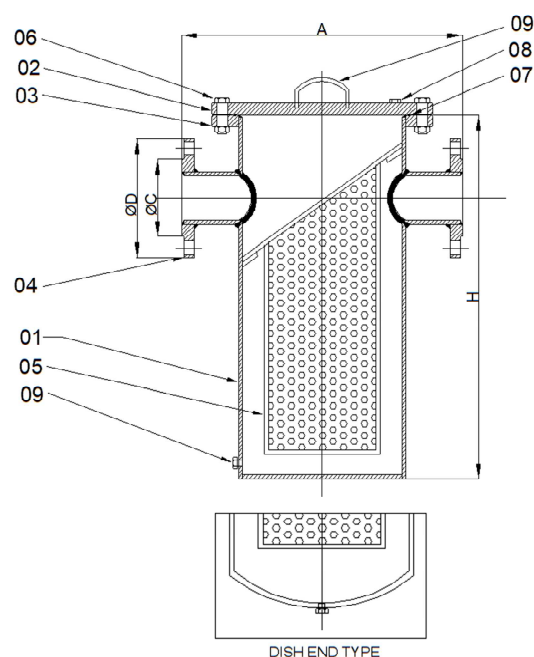

DESIGN STANDARD

Design	CAST AND FABRICATED, MNFR's Std
Face to Face / End to End Dimensions	ASME B16.10, MNFR's Std
Valve inspection & testing	MNFR's STD, API598
Pressure - Temperature rating	ASME B16.34

RATING - 150#

DN (inch)	A	H	B	ØC	ØD	ØM	N	PCD
1" (DN25)	200	250	11	51	108	16	4	79
1 ½" (DN40)	260	300	14	73	127	16	4	98.5
2" (DN 50)	260	300	16	92	152	19	4	120.5
2 1/2" (DN 65)	260	300	17.5	105	178	19	4	140
3" (DN 80)	300	315	19	127	190.5	19	4	152.4
4" (DN 125)	330	350	24	157	229	19	8	190.5
5" (DN 125)	400	400	24	185.6	254	22	8	215.9
6" (DN 150)	400	425	25	216	279	22	8	241
8" (DN 200)	465	550	28.5	270	343	22	8	298.4
10" (DN 250)	515	700	30	324	406	25	12	362
12" (DN 300)	575	850	32	381	483	25	12	432
14" (DN 350)	680	900	35	412.7	533.4	28.6	12	476.2
16" (DN 400)	750	1000	35.5	469.9	596.9	28.6	16	539.7
18" (DN 450)	850	1100	40	533.4	635	31.7	16	577.8
20" (DN 500)	1000	1200	43	584.2	698.5	31.7	20	635
24" (DN 600)	1200	1300	47.6	692.1	812.8	34.9	20	749.3