


Y TYPE STRAINERS - FABRICATED AND CAST STEEL

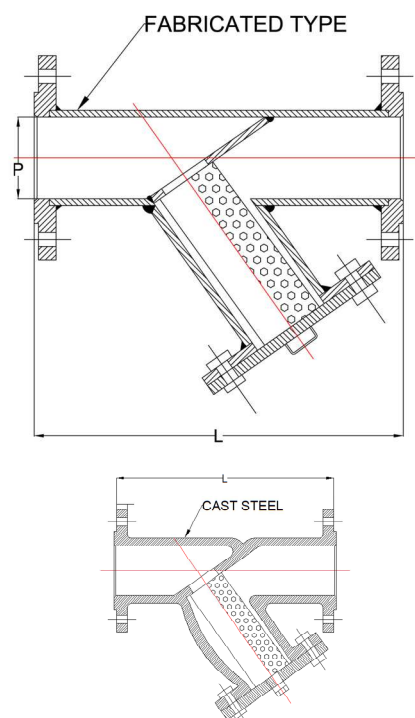

DESIGN STANDARD

Design	CAST AND FABRICATED, MNFR's Std
Face to Face / End to End Dimensions	ASME B16.10, MNFR's Std
Valve inspection & testing	MNFR's STD, API598
Pressure - Temperature rating	ASME B16.34

RATING - 150#

DN (inch)	L	P	øC	øD	øM	N	PCD
1" (DN25)	127	25	51	108	16	4	79
1 1/2" (DN40)	165	39	73	127	16	4	98.5
2" (DN 50)	203	49	92	152	19	4	120.5
2 1/2" (DN 65)	216	64.9	105	178	19	4	140
3" (DN 80)	241	80	127	190.5	19	4	152.4
4" (DN 125)	292	100	157	229	19	8	190.5
5" (DN 125)	356	125	185.6	254	22	8	215.9
6" (DN 150)	406	148	216	279	22	8	241
8" (DN 200)	495	199	270	343	22	8	298.4
10" (DN 250)	622	249	324	406	25	12	362
12" (DN 300)	698	300	381	483	25	12	432
14" (DN 350)	787	348	413	533.4	28.6	12	476.2